


# Insulated and hinged access door for square duct

## IPFD



### Dimensions

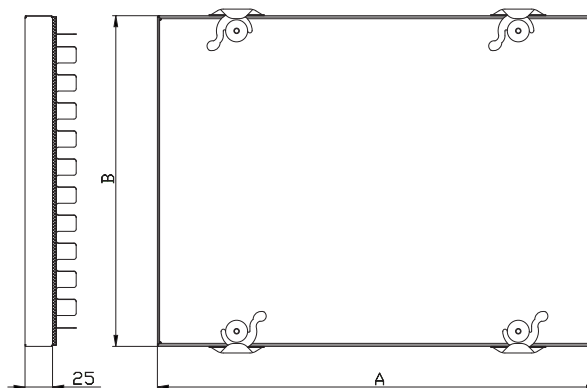

### Description

The IPFD access door enables maintenance and cleaning of square ducts. The access door is made from galvanized steel sheet. The frame in contact with the duct wall has a rubber mat seal. The access door features a 25 mm thick thermal insulation layer made from glass wool. Four clasp locks allow easy opening and closing of the access door.

If properly installed and closed, the access door provides air insulation class C.

#### Available materials — Product code examples

IPFD-... galvanized steel sheet

#### Product code example

Product code: **IPFD - aaa**

type \_\_\_\_\_

AxB \_\_\_\_\_

| Product code | A (mm) | B (mm) | Number of clasp locks |
|--------------|--------|--------|-----------------------|
| IPFD-100-100 | 100    | 100    | 2                     |
| IPFD-150-100 | 150    | 100    | 2                     |
| IPFD-150-150 | 150    | 150    | 2                     |
| IPFD-200-100 | 200    | 100    | 2                     |
| IPFD-200-125 | 200    | 125    | 2                     |
| IPFD-200-200 | 200    | 200    | 2                     |
| IPFD-250-250 | 250    | 250    | 4                     |
| IPFD-300-150 | 300    | 150    | 4                     |
| IPFD-300-200 | 300    | 200    | 4                     |
| IPFD-300-300 | 300    | 300    | 4                     |
| IPFD-350-350 | 350    | 350    | 4                     |
| IPFD-400-200 | 400    | 200    | 4                     |
| IPFD-400-300 | 400    | 300    | 4                     |
| IPFD-400-400 | 400    | 400    | 4                     |
| IPFD-450-300 | 450    | 300    | 4                     |
| IPFD-450-450 | 450    | 450    | 8                     |
| IPFD-500-500 | 500    | 500    | 8                     |
| IPFD-600-300 | 600    | 300    | 8                     |
| IPFD-600-400 | 600    | 400    | 8                     |
| IPFD-600-450 | 600    | 450    | 8                     |
| IPFD-600-600 | 600    | 600    | 8                     |